


Tree/ Palm protection fences shall be constructed prior to any construction activity including grubbing for all trees/Palms that are to remain, be protected or be relocated.

No activity or disturbance should occur within the fenced areas, including vehicle use, storage of materials, dumping of liquids or materials, grade changes, grubbing, and mechanical trenching for irrigation, electrical, lighting, etc.

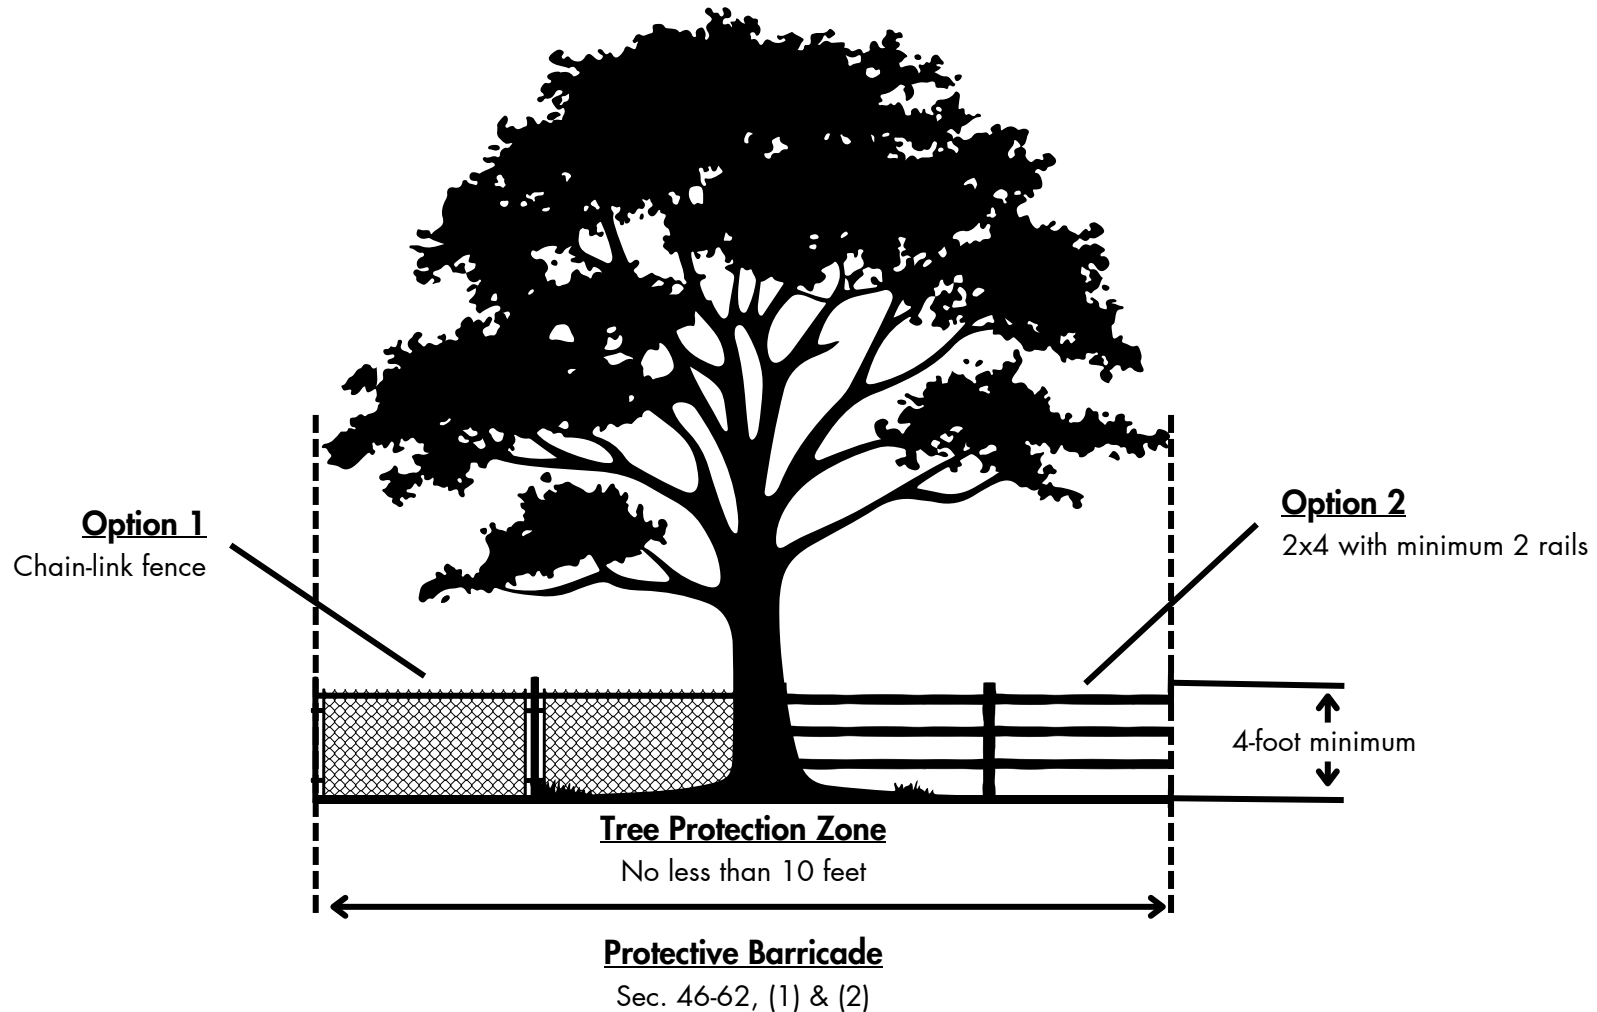

Protection detail note:

The contractor shall install tree protection fence barriers around all existing trees or palms at the start of the project. Barriers shall remain in place throughout the project and should not be removed or dropped without authorization from the City of Miami Beach Urban Forestry Division.